

Line type LED Lighting

ASYCK LITE Series



Characteristics

- 1) Thickness 10mm : Compact & Smart Design
- 2) Luminous Color : Daylight White / Warm White / Medium White
- 3) 6 or 12 PowerLED mounted
- 4) Total Luminous Flux : 183 lm(AI-1212W)
- 5) Input Voltage : DC24V
- 6) Power Consumption : 4.8W(AI-1212)
- 7) Long Operating Life(40,000 hours)

**At 70% of Initial output*

Description of Part Number

A I - 1 2 * * * - * *
 (1) (2) (3) (4) (5)

(1) Model Code	AI-12
(2) Number of LEDs	06 : 6 LEDs 12 : 12 LEDs
(3) Luminous Color	D : Daylight white L : Warm white M : Medium white
(4) Lens Type	C : Colorless Clear D : Diffused
(5) Case Color	W : White Color B : Black Color

Unit Specification

[6LED type]


Item	Ratings			Unit
	Daylight White AI-1206D-**-	Warm White AI-1206L-**-	Medium White AI-1206M-**-	
Input Voltage	DC24			V
Power Consumption	2.4			W
Total Luminous Flux	(92)	(77)	(84)	lm
Operating Temperature Range	-10 to +40			°C

[12LED type]

Item	Ratings			Unit
	Daylight White AI-1212D-**-	Warm White AI-1212L-**-	Medium White AI-1212M-**-	
Input Voltage	DC24			V
Power Consumption	4.8			W
Total Luminous Flux	(183)	(154)	(168)	lm
Operating Temperature Range	-10 to +40			°C

Package Dimensions


Unit : mm
Tolerance : ±0.5

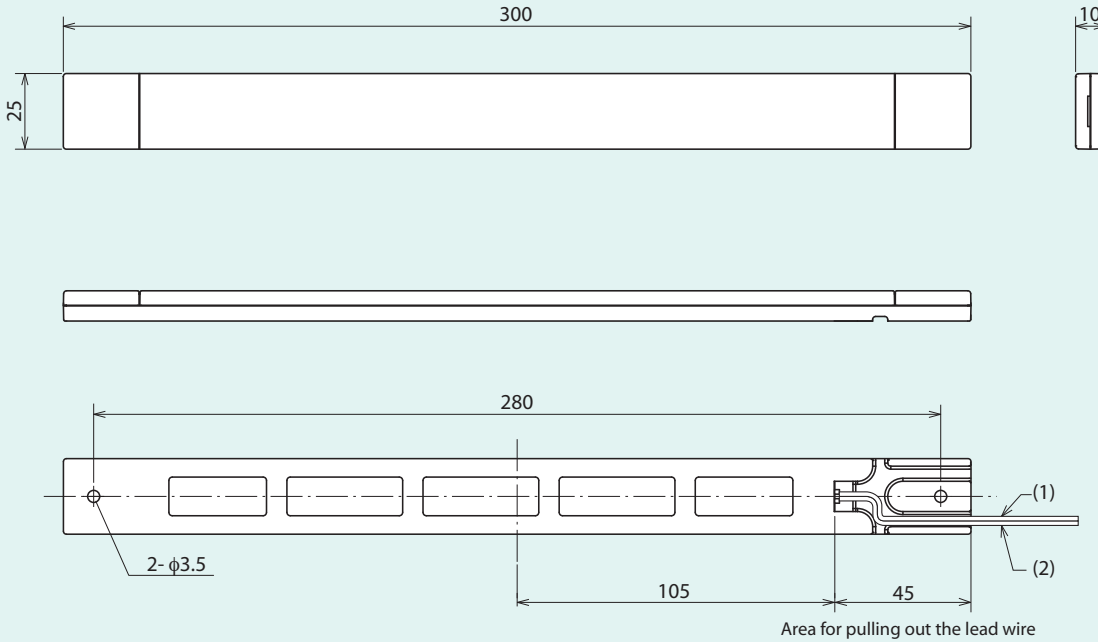


(1) Cathode(-)/ Gray/ 300mm
(2) Anode(+)/ Gray/ 300mm

Illuminance Distribution


AI-1212D-C




AI-1212M-C




AI-1212L-C




AI-1212D-D



AI-1212M-D



AI-1212L-D



*These are measuremental value not guaranteed value.

· The appearance and specifications of the product may be modified for improvement without notice.



US A'SYCK, CORP.

Manufactured by A'SYCK Co., Ltd.

17880 Sky Park Circle, Suite 280, Irvine, CA 92614
Phone: (949)724-1618 Fax: (949)724-1686

37-1, Nishiura, Hironocho, Uji City, Kyoto, JAPAN 611-0031
Phone: 010-81-774-44-6544 Fax: 010-81-774-44-6575