

# Line type LED Lighting

## ASYCK LITE Series



### Characteristics

- 1) Thickness 10mm : Compact & Smart Design
- 2) Luminous Color : Daylight White / Warm White / Medium White
- 3) 6 or 12 PowerLED mounted
- 4) Total Luminous Flux : 183 lm(AI-1212W)
- 5) Input Voltage : DC24V
- 6) Power Consumption : 4.8W(AI-1212)
- 7) Long Operating Life(40,000 hours)

\*At 70% of Initial output

### Description of Part Number

**A I - 1 2 \* \* \* - \* \***  
 (1) (2) (3) (4) (5)

(1) Model Code	AI-12
(2) Number of LEDs	06 : 6 LEDs    12 : 12 LEDs
(3) Luminous Color	D : Daylight white    L : Warm white    M : Medium white
(4) Lens Type	C : Colorless Clear    D : Diffused
(5) Case Color	W : White Color    B : Black Color

### Unit Specification

#### [ 6LED type ]


Item	Ratings			Unit
	Daylight White AI-1206D-**-	Warm White AI-1206L-**-	Medium White AI-1206M-**-	
Input Voltage	DC24			V
Power Consumption	2.4			W
Total Luminous Flux	(92)	(77)	(84)	lm
Operating Temperature Range	-10 to +40			°C

#### [ 12LED type ]

Item	Ratings			Unit
	Daylight White AI-1212D-**-	Warm White AI-1212L-**-	Medium White AI-1212M-**-	
Input Voltage	DC24			V
Power Consumption	4.8			W
Total Luminous Flux	(183)	(154)	(168)	lm
Operating Temperature Range	-10 to +40			°C


## Package Dimensions

Unit : mm  
Tolerance : ±0.5

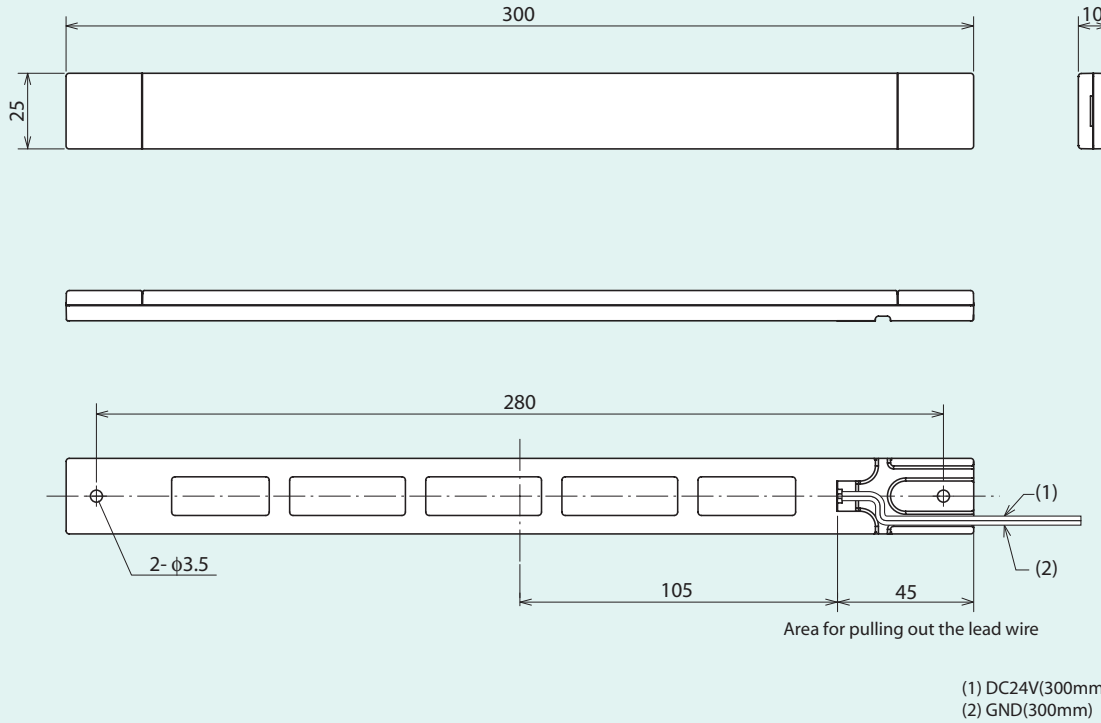


## Illuminance Distribution


AI-1212D-C




AI-1212M-C




AI-1212L-C




AI-1212D-D



AI-1212M-D



AI-1212L-D



\*These are measuremental value not guaranteed value.

· The appearance and specifications of the product may be modified for improvement without notice.



**US A'SYCK, CORP.**

Manufactured by A'SYCK Co., Ltd.

17880 Sky Park Circle, Suite 280, Irvine, CA 92614  
Phone: (949)724-1618 Fax: (949)724-1686

37-1, Nishiura, Hironocho, Uji City, Kyoto, JAPAN 611-0031  
Phone: 010-81-774-44-6544 Fax: 010-81-774-44-6575